

### DESCRIPTION AND APPLICATIONS

Surface coated, very fine, Calcium Carbonate powder obtained from high purity, very white limestone with the highest technology. used in several Plastic applications such as PVC pipes, mould elements Master patch, cables industries, Rubbers and leather industries, etc

### CHEMICAL ANALYSIS

CaCO <sub>3</sub>	99.20%
CaO	55.68%
MgO	0.01%
Fe <sub>2</sub> O <sub>3</sub>	0.03%
SiO <sub>2</sub>	0.12%
Al <sub>2</sub> O <sub>3</sub>	0.02%
L.O.I	44.15%
HCl insoluble content	0.20 %

### SPECIFICATION AND PRODUCT DATA


Fineness:	
Top cut (d <sub>97</sub> )	13.50 µm +/- 2 µm
Mean particle size (d <sub>50</sub> )	3.2 µm +/- 0.5 µm
Particles under 2 µm	35 %

### PHYSICAL CHARACTERISTICS

Whiteness	
(ASTM E-313 or other equivalent standards): L* >97.7	
Brightness %	96.0%
Moisture	0.20 %Max
Hardness by Moh's	3 Moh's
Specific gravity	2.73 g/cm <sup>3</sup>

### GENERAL PRODUCT DATA

Bulk density	0.95g/ml
pH value	9 (Iso787/9)
Oil absorption	17g/100g (Iso787/5)
DOP absorption	18.50 g/100g (Iso787/5)
Stearic acid	1.00%

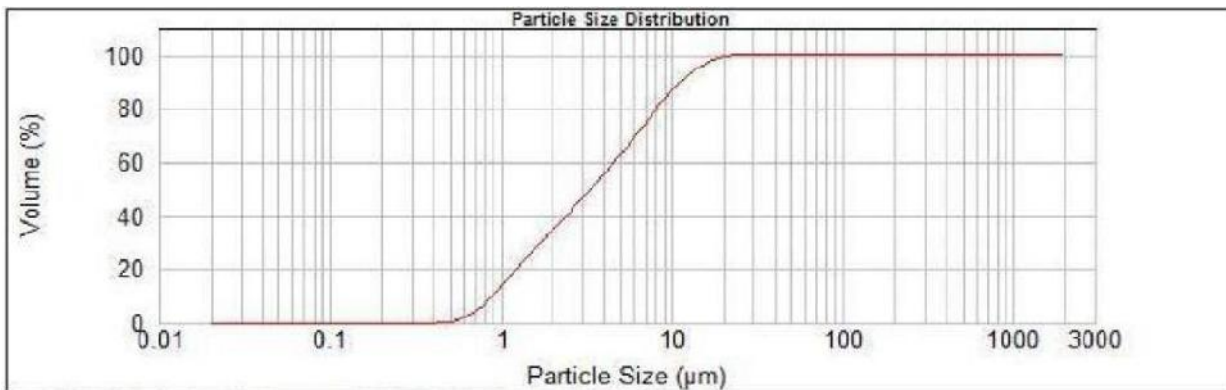

The data in the Technical Data Sheet represents average values which are valid and reliable but not legally binding. CS will not be liable for any use of data, or any damages arising from the use of products for purposes not examined in detail. This Technical Data Sheet renders all previous versions invalid. (JAN018).